

M43 HIREACH



Built for You.

KEY FEATURES

- 1 Cable-free hydraulic boom extension for smooth 'point and shoot' functionality
- 2 Industry-leading unrestricted side reach and 360 degree stability
- 3 Oversized two-person steel work platform with EZR quick connect system and platform stowed jib winch
- 4 Dynasmooth controls for smooth and precise operation
- 5 Full length subframe with hydraulic outriggers for excellent stability and long chassis life

TECHNICAL SPECS

WORKING HEIGHT	48' / 14,6 m
SIDE REACH	38' / 11,6 m
PLATFORM CAPACITY	500 lbs / 227 kg
PLATFORM SIZE	30"x 54" / 76 x 137 cm
MAIN WINCH CAPACITY	2,000 lbs / 907 kg
JIB WINCH CAPACITY	500 lbs / 227 kg
FRONT OUTRIGGER SPREAD	9'9" / 2,9 m
REAR OUTRIGGER SPREAD	9'9" / 2,9 m
CAB TO AXLE	108" / 274 cm
MINIMUM GVWR	19,500 lbs / 8845 kg




EZR Work Platform
30" x 54" steel platform with skid-resistant aluminum floor. Removable for lifting loads with the main winch and boom tip sheave

Material Handling Main Winch
Elliott's 2,000 lb main winch option allows lifting loads with the work platform attached or removed, increasing lifting versatility

Oversized Cable Carrier
Reliably carries hydraulic, electric, welding, oxy/acetylene, air and other accessory lines to the work platform

Compact and Versatile Design
Engineered to be installed on a 19,500 lb GVWR truck with a narrow outrigger spread to work in tight spaces

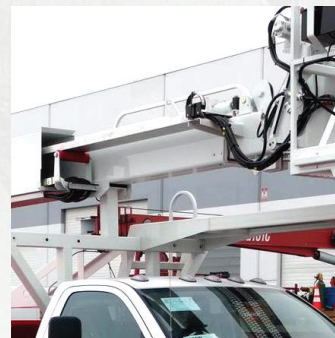

FEATURES

Work Platform: Hydraulically self-leveling and rotating steel 30" x 54" EZR removable work platform with aluminum floor. Features 90 degrees of rotation. Includes water-resistant upper control box with multi-joystick controls.

Hydraulic System: Hydraulically powered continuous rotation mechanism. Holding valves on all cylinders. 12V Emergency pump.

Control System: Manual hydraulic controls mounted on turret. Electronic proportional three-stick remote controls in work platform with hi-lo range for smooth operation in tight spaces. Includes remote engine start/stop, engine speed, and emergency stop switch.


Outriggers: "A" type hydraulically powered main outriggers and straight-down "A" type outriggers behind cab. Outrigger controls mounted at rear of bed at ground level. 360 degree stability.

Certification: Certified to ANSI A92.2 for Vehicle-Mounted Elevating and Rotating Aerial Devices.

**Specifications are subject to change.*

MAXIMUM WORKING LOADS PLATFORM AND JIB OPERATION

MAX PLATFORM CAPACITY: 500 LBS MAX JIB CAPACITY: 500 LBS

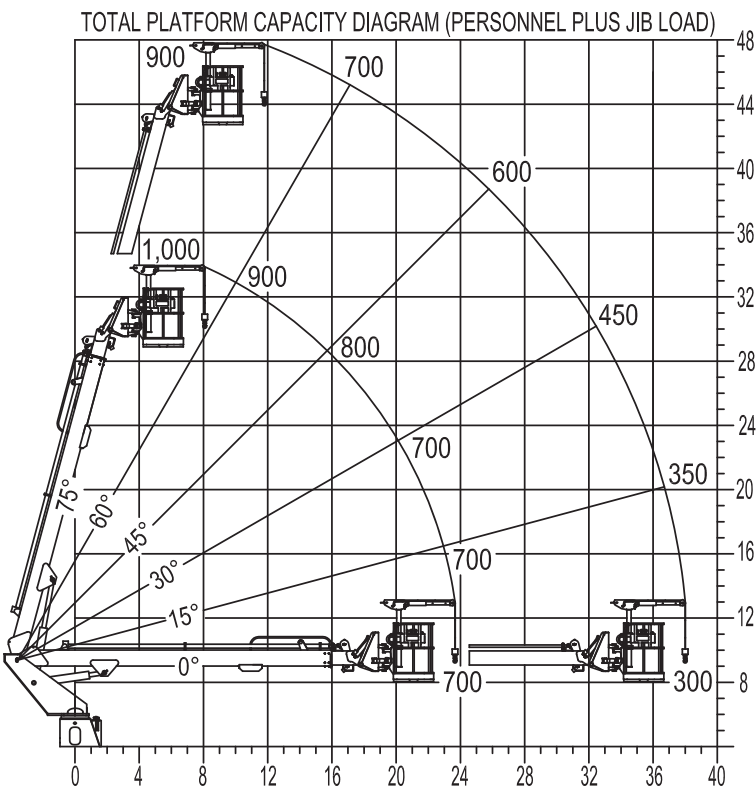

USE OUTRIGGERS AT ALL TIMES · AVOID JERKING LOADS · 360° RADIUS

DO NOT PAINT OVER ANY LABELS

1219500 120516

AVAILABLE OPTIONS

500 lb. Capacity Stowable Jib Winch in the Work Platform

2,000 lb. Capacity Material Handling Main Winch

110V Lines, Welding Leads, Oxy/Acetylene Leads, Air Lines, Water Lines and More to the Work Platform

(2) Sign Forks on the Work Platform

Walkway Access to the Work Platform with the Boom Stowed

Steel, Wood, or Aluminum Flatbeds

Customizable Steel Bumpers

Steel or Aluminum Toolboxes

Composite or Wooden Outrigger Pads

Spanish/Metric Charts

Paint White, Red or Custom Colors

Much More...