

Stellar® Adjustable Sliding Jib Hooklift Hoists

# SLIDER20 & 26



## TECHNICAL SPECIFICATION GUIDE




The Stellar® Slider hooklift hoist is a container handling system mounted on a truck chassis that is capable of loading, unloading and dumping various containers of varying lengths through the use of a sliding hexagonal jib. The hex jib reduces flex and provides greater structural integrity.

The Slider still maintains all of Stellar Industries' safety and mechanical features, such as the in-cab controls and safety latches, to insure stability and secure attachment. All Stellar hooklift hoists feature permanently lubricated greaseable bushings, stainless steel pins and an efficient low-flow / high-pressure hydraulic system.



*Our People. Our Products.*

# STELLAR<sup>®</sup> SLIDER20 AND SLIDER26 HOOKLIFT

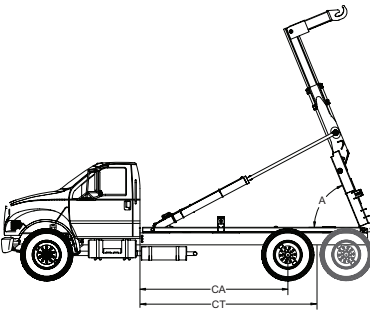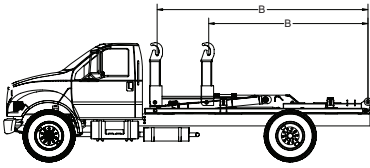

**Item Description**  
Lifting Capacity

Dumping Capacity

**A.** Dump Angle

**B.** Effective Length

**CA.** Cab to Axle

**CT.** Cab to Trunnion

**D.** Below Grade

Shipping Weight

Rec. Body Lengths

Hook Height (Fixed)

Hook Height (Hyd.)

Min. Truck GVWR

**Slider20 - 54"**

20,000 lb.  
(9,071 kg)

20,000 lb.  
(9,071 kg)

55°

143"-185"  
(3,632-4,699 mm)

138"-156"  
(3,505-3,962 mm)

138"-156"  
(3,505-3,962 mm)

7"  
(178 mm)

3,500 lb.  
(1,588 kg)

13' - 18'  
(3,962-5,486 mm)

54"  
(1,372 mm)

-

25,000 lb.  
(11,340 kg)

**Slider20 - 61.75"**

20,000 lb.  
(9,071 kg)

20,000 lb.  
(9,071 kg)

55°

143"-185"  
(3,632-4,699 mm)

138"-156"  
(3,505-3,962 mm)

138"-156"  
(3,505-3,962 mm)

14.75"  
(375 mm)

3,600 lb.  
(1,633 kg)

13' - 18'  
(3,962-5,486 mm)

61.75"  
(1,568 mm)

-

25,000 lb.  
(11,340 kg)

**Slider20 - 54" or 61.75"**  
20,000 lb.  
(9,071 kg)

20,000 lb.  
(9,071 kg)

55°

143"-185"  
(3,632-4,699 mm)

138"-156"  
(3,505-3,962 mm)

138"-156"  
(3,505-3,962 mm)

7" or 14.75"  
(178 or 375 mm)

3,700 lb.  
(1,678 kg)

13' - 18'  
(3,962-5,486 mm)

-

54 or 61.75"  
(1,372 or 1,568 mm)

25,000 lb.  
(11,340 kg)

**Item Description**  
Lifting Capacity

Dumping Capacity

**A.** Dump Angle

**B.** Effective Length

**CA.** Cab to Axle

**CT.** Cab to Trunnion

**D.** Below Grade

Shipping Weight

Rec. Body Lengths

Hook Height (Fixed)

Hook Height (Hyd.)

Min. Truck GVWR

**Slider26 - 36.63"**

26,000 lb.  
(11,703 kg)

26,000 lb.  
(11,703 kg)

68°

120.4"-169.4"  
(3,058 mm-4,302 mm)

130"-144"  
(3,302-3,658 mm)

130"-138"  
(3,302-3,505 mm)

6"  
(152 mm)

3,200 lb.  
(1,451 kg)

12' - 16'  
(3,658-4,877 mm)

35.63"  
(905 mm)

-

25,000 lb.  
(11,340 kg)

**Slider26 - 54"**

26,000 lb.  
(11,703 kg)

26,000 lb.  
(11,703 kg)

68°

120.4"-169.4"  
(3,058 mm-4,302 mm)

130"-144"  
(3,302-3,658 mm)

130"-138"  
(3,302-3,505 mm)

41.5"  
(1,054 mm)

3,300 lb.  
(1,497 kg)

12'-16'  
(3,658-4,877 mm)

54"  
(1,372 mm)

-

25,000 lb.  
(11,340 kg)

**Slider26 - 61.75"**

26,000 lb.  
(11,703 kg)

26,000 lb.  
(11,703 kg)

68°

120.4"-169.4"  
(3,058 mm-4,302 mm)

130"-144"  
(3,302-3,658 mm)

130"-138"  
(3,302-3,505 mm)

48.5"  
(1,232 mm)

3,400 lb.  
(1,452 kg)

12'-16'  
(3,658-4,877 mm)

61.75"  
(1,568 mm)

-

25,000 lb.  
(11,340 kg)

**Slider26 - 35.63" or 54"**

26,000 lb.  
(11,703 kg)

26,000 lb.  
(11,703 kg)

68°

120.4"-169.4"  
(3,058 mm-4,302 mm)

130"-144"  
(3,302-3,658 mm)

130"-138"  
(3,302-3,505 mm)

6" or 41.5"  
(152-1,054 mm)

3,400 lb.  
(1,452 kg)

12'-16'  
(3,658-4,877 mm)

-

35.63" or 54"  
(905-1,372 mm)

25,000 lb.  
(11,340 kg)

**Slider26 - 54" or 61.75"**

26,000 lb.  
(11,703 kg)

26,000 lb.  
(11,703 kg)

68°

120.4"-169.4"  
(3,058 mm-4,302 mm)

130"-144"  
(3,302-3,658 mm)

130"-138"  
(3,302-3,505 mm)

41.5" or 48.5"  
(1,054-1,232 mm)

3,400 lb.  
(1,452 kg)

12'-16'  
(3,658-4,877 mm)


-

54 or 61.75"  
(1,372 or 1,568 mm)

25,000 lb.  
(11,340 kg)

\*When using a tarping system - Add 12" to C.A or C.T.

## ■ KEY FEATURES

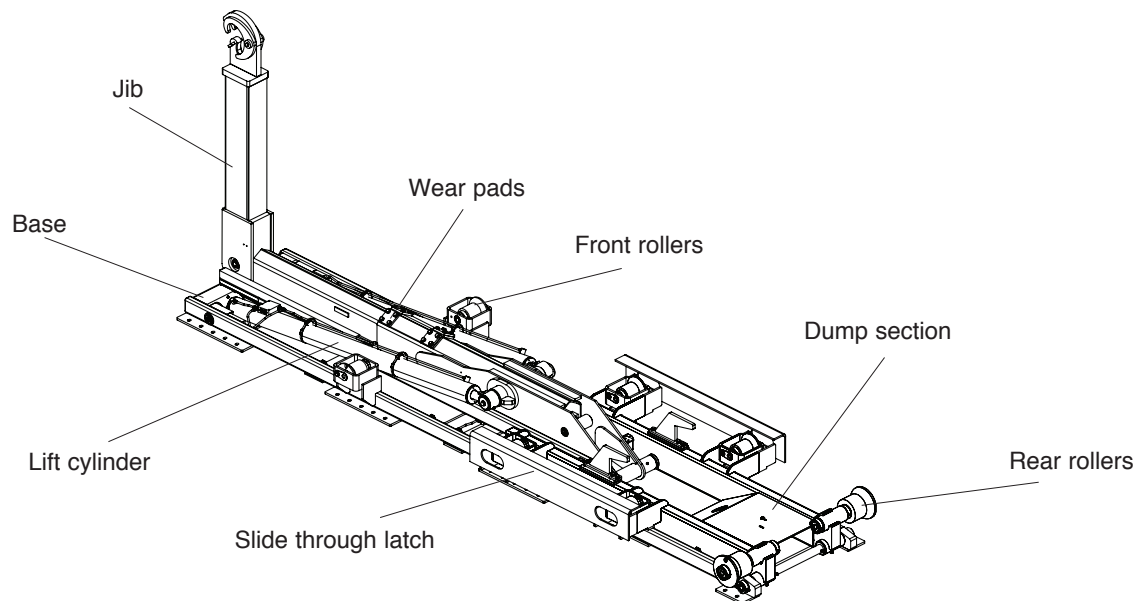

- Base section** The base section of a Stellar Slider may also be called a sub-frame. All Stellar Slider hooklifts are tied together in one common framework. This base section not only adds strength to the loader, but it places less stress concentration on the truck chassis than hooklifts without a common base. The base section provides for simple installation on most truck chassis.
- Latches** Inside and or outside latches available.
- Jib/secondary** The sliding jib allows for a wider range of container lengths and a means to control the truck's weight distribution while remaining in the latches. The jib and secondary booms are hexagonal shaped to reduce flexing, adding to structural integrity.
- Wear pads** Easily replaceable wear pads for the jib/secondary boom assemblies that can be changed in minutes. Not necessary to disassemble hooklift to replace wear pads. The wear pads ensure long life for the jib/secondary assemblies.
- Dump section** Dumping is accomplished through rear pivot point. Jib and dump sections must lock together to support the full length of container/body when in the dump mode.
- Skid rollers** These three sets of rollers allows skid to roll freely forward and backwards while operating the jib. Prevent long sills from wearing prematurely, not dragging steel on steel. Also eliminates the need to replace wear pads on base frame.
- Bushings and zerks** Bushings and grease zerks at all pivot points.
- Counterbalance valves** Counterbalance valves are used on all cylinders, protecting both extend and retract functions in case of a hydraulic hose failure.
- Pins** Carbon steel and zinc plated or type 17-4 stainless steel to prevent corrosion.



■ **Stellar® Slider (Sliding Jib)**

Model	Hook Height	Lift Capacity (lbs)	Effective Length (in)	Body Lengths (ft)	Cab-To-Axle/Trunnion
Slider20 (Fixed)	54 (1,372 mm)	20,000 (9,071 kg)	143/185 (3,632/4,699 mm)	13-18 (3,962-5,486 mm)	138-156 C.A. (3,505-3,962 mm)
Slider20 (Fixed)	61.75 (1,568 mm)	20,000 (9,071 kg)	143/185 (3,632/4,699 mm)	13-18 (3,962-5,486 mm)	138-156 C.A. (3,505-3,962 mm)
Slider20 (Hyd.)	54 or 61.75	20,000 (9,071 kg)	143/185 (3,632/4,699 mm)	13-18 (3,962-5,486 mm)	138-156 C.A. (3,505-3,962 mm)
Slider20-S (Fixed)	35.63 (905 mm)	20,000 (9,071 kg)	112/142 (2,845-3,607 mm)	10-14 (3,048-4,267 mm)	120 C.A. (3,048 mm)
Slider20-S (Fixed)	54 (1,372 mm)	20,000 (9,071 kg)	112/142 (2,845-3,607 mm)	10-14 (3,048-4,267 mm)	120 C.A. (3,048 mm)
Slider20-S (Hyd.)	35.63 or 54	20,000 (9,071 kg)	112/142 (2,845-3,607 mm)	10-14 (3,048-4,267 mm)	120 C.A. (3,048 mm)
Slider26 (Fixed)	35.63 (905 mm)	Up to 26,000 (9,071 kg)	129/171 (3,277/4,343 mm)	12-16 (3,658-4,877 mm)	130-144 C.A. (3,302-3,658 mm)
Slider26 (Fixed)	54 (1,372 mm)	Up to 26,000 (9,071 kg)	129/171 (3,277/4,343 mm)	12-16 (3,658-4,877 mm)	130-138 C.T. (3,302-3,505 mm)
Slider26 (Fixed)	61.75 (1,568 mm)	Up to 26,000 (9,071 kg)	129/171 (3,277/4,343 mm)	12-16 (3,658-4,877 mm)	130-138 C.T. (3,302-3,505 mm)
Slider26 (Hyd.)	35.63 or 54	Up to 26,000 (9,071 kg)	129/171 (3,277/4,343 mm)	12-16 (3,658-4,877 mm)	130-138 C.T. (3,302-3,505 mm)
Slider26 (Hyd.)	54 or 61.75	Up to 26,000 (9,071 kg)	129/171 (3,277/4,343 mm)	12-16 (3,658-4,877 mm)	130-138 C.T. (3,302-3,505 mm)
Slider34 (Fixed)	54 (1,372 mm)	28,000 (12,001 kg)	168/208 (4,267/5,283 mm)	14-20 (4,267-6,096 mm)	160-174 C.T. (4,064-4,420 mm)
Slider34 (Fixed)	61.75 (1,568 mm)	34,000 (15,422 kg)	168/208 (4,267/5,283 mm)	14-20 (4,267-6,096 mm)	160-174 C.T. (4,064-4,420 mm)
Slider34 (Hyd.)	54 or 61.75	34,000 (15,422 kg)	168/208 (4,267/5,283 mm)	14-20 (4,267-6,096 mm)	160-174 C.T. (4,064-4,420 mm)
Slider40 (Fixed)	54 (1,372 mm)	37,000 (16,783 kg)	132/168 (3,353/4,267 mm)	12-16 (3,658-4,877 mm)	130-144 C.T. (3,302-3,658 mm)
Slider40 (Fixed)	61.75 (1,568 mm)	40,000 (18,144 kg)	132/168 (3,353/4,267 mm)	12-16 (3,658-4,877 mm)	130-144 C.T. (3,302-3,658 mm)
Slider40 (Hyd.)	54 or 61.75	40,000 (18,144 kg)	132/168 (3,353/4,267 mm)	12-16 (3,658-4,877 mm)	130-144 C.T. (3,302-3,658 mm)
Slider50 (Fixed)	54 (1,372 mm)	42,000 (19,051 kg)	192/238 (4,877/6,046 mm)	16-22 (4,877-6,706 mm)	202 C.T. (5,131 mm)
Slider50 (Fixed)	61.75 (1,568 mm)	50,000 (22,680 kg)	192/238 (4,877/6,046 mm)	16-22 (4,877-6,706 mm)	202 C.T. (5,131 mm)
Slider50 (Hyd.)	54 or 61.75	50,000 (22,680 kg)	192/238 (4,877/6,046 mm)	16-22 (4,877-6,706 mm)	202 C.T. (5,131 mm)
Slider65 (Fixed)	54 (1,372 mm)	52,000 (23,587 kg)	193/217 (4,902/5,512 mm)	16-21.5 (4,877-6,553 mm)	170-190 C.T. (4,318-4,826 mm)
Slider65 (Fixed)	61.75 (1,568 mm)	65,000 (29,484 kg)	193/217 (4,902/5,512 mm)	16-21.5 (4,877-6,553 mm)	170-190 C.T. (4,318-4,826 mm)
Slider65 (Hyd.)	54 or 61.75	65,000 (29,484 kg)	193/217 (4,902/5,512 mm)	16-21.5 (4,877-6,553 mm)	170-190 C.T. (4,318-4,826 mm)



\* This data is for reference purposes only, and is not intended to replace a properly calculated weight distribution.

Your local distributor:



190 State Street  
 P.O. Box 169  
 Garner, IA 50438  
 Telephone: (641) 923-3741 • (800) 321-3741  
 Fax: (641) 923-2812  
 Internet: [www.stellarindustries.com](http://www.stellarindustries.com)  
 Email: [sales@stellarindustries.com](mailto:sales@stellarindustries.com)

Government specifications available.

\* All specifications are subject to change without notification.

For the most up to date version of this brochure, please visit [www.stellarindustries.com](http://www.stellarindustries.com).

An Employee Owned Company.

Copyright © 2016 Stellar Industries, Inc.

STL000087 6/16